

Flood Light Collection

Selected collection of Flood lights
by Spiral Lighting,
featuring products with diverse
functions including
AC power Flood lights
Toggle Switch Flood Lights
Senser Flood Lights
Solar Flood Lights



www.spiral-lighting.com



Yantai Spiral Lighting Co.,LTD




Headquarter Base: Zhifu District, Yantai, Shandong, China
Branch Company: Guzhen, Zhongshan, Guangdong, China
R&D Center: Shenzhen, Guangdong, China



Sales@Spiral-lighting.com

Luna Flood Lights




High transmittance Matte Cover

The light transmission rate of Matte Cover is 95% of that of ordinary glass, providing soft light without any loss in brightness.



Adjustable infrared sensor

Adjustable sensitivity and response time, and the option to freely switch between day/night operation modes.




Watt.	Color Temp.	Lm	Driver	Unit Size
10W	2800K/4000k/6500k	800	Linear I	99*76*33.1MM
20W	2800K/4000k/6500k	1600	Linear I	99*76*33.1MM
30W	2800K/4000k/6500k	2400	Linear I	133*99*31MM
50W	2800K/4000k/6500k	4000	Linear I	173*126*32.2MM

Product application diagram



Apple 1 Flood Lights



Highlighting LED Chips with textured glass

The light transmittance is over 92%, ensuring the optimal performance of the LED Chips.




Optional sensor installation

Adjustable sensitivity and response time, and the option to freely switch between day/night operation modes.





Product application diagram

Watt.	Color Temp.	Lm	Driver	Unit Size
10W	2800K/4000k/6500k	1100	Linear I	104. 5*84. 5*28. 3MM
20W	2800K/4000k/6500k	2200	Linear I	118*93*28. 3MM
30W	2800K/4000k/6500k	3300	Linear I	160*120*28. 5MM
50W	2800K/4000k/6500k	5500	Linear I	203. 8*145*29. 5MM
70W	2800K/4000k/6500k	7700	Linear I	236. 5*177*29. 5MM
100W	2800K/4000k/6500k	11000	Linear I	269*209*29. 65MM
150W	2800K/4000k/6500k	16500	Linear I	334*228. 5*30. 65MM
200W	2800K/4000k/6500k	22000	Linear I	377. 5*277*31. 3MM

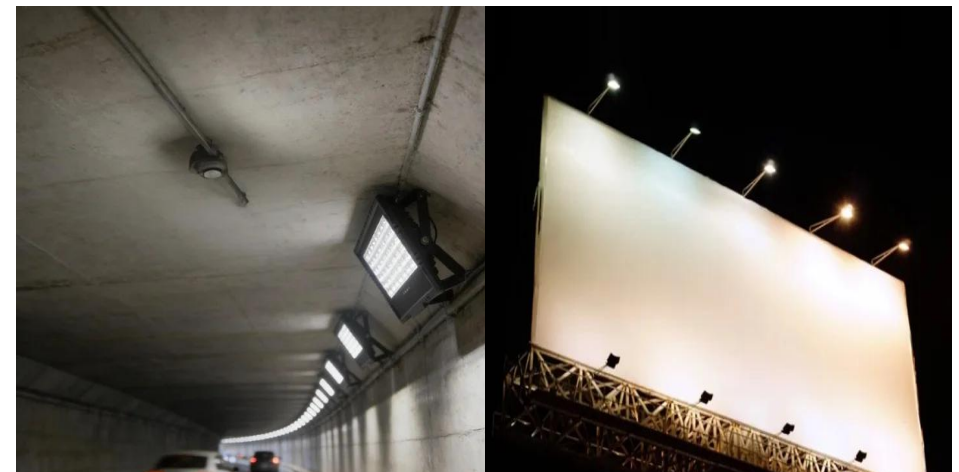

Apple 2 Flood Lights



Highlighting LED Chips with textured glass

The light transmittance is over 92%, ensuring the optimal performance of the LED Chips.



High-strength aluminum material

Using high-strength aluminum materials and die-casting technology to enhance the product's strength.

RA>80

PF>0.9

Warranty:
2Years

Beam Angle:
120°

Material:
ALU+Glass



Watt.	Color Temp.	Lm	Unit Size
10W	6000-6500K	900	95*26*65MM
20W	6000-6500K	1800	108*26*75MM
30W	6000-6500K	2700	143*26*101MM
50W	6000-6500K	4500	174*26*124MM
70W	6000-6500K	6300	207*26*147MM
100W	6000-6500K	9000	274*26*190MM
150W	6000-6500K	13500	305*31*225MM
200W	6000-6500K	18000	358*33*268MM
300W	6000-6500K	27000	430*37*320MM

Product application diagram



Apple 3 Toggle Switch Flood Lights (Detachable Sensor)



+Detachable Sensor

RA>80

PF>0.9

Warranty:
2Years


Beam Angle:
120°

Material:
ALU+Glass

3CCT
Change

IP65


Watt.	Color Temp.	Lm	Driver	Unit Size
10W	3CCT	1000	Linear I	92*70*31MM
20W	3CCT	2000	Linear I	120*95*31MM
30W	3CCT	3000	Linear I	153*125*31MM
50W	3CCT	5000	Linear I	188*146*31MM
70W	3CCT	7000	Linear I	228*185*32MM
100W	3CCT	10000	Linear I	272*217*32MM
150W	3CCT	15000	Linear I	327*263*32MM
200W	3CCT	20000	Linear I	378*298*34MM
300W	3CCT	30000	Linear I	378*298*34MM

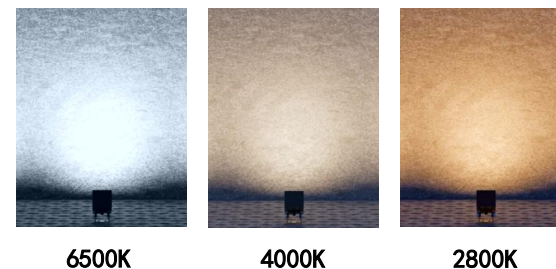

Turn the switch to adjust the color temperature

By turn the switch at the bottom of the lamp body, you can easily adjust the color temperature of the product (6500K/4000K/2800K)

Product application diagram

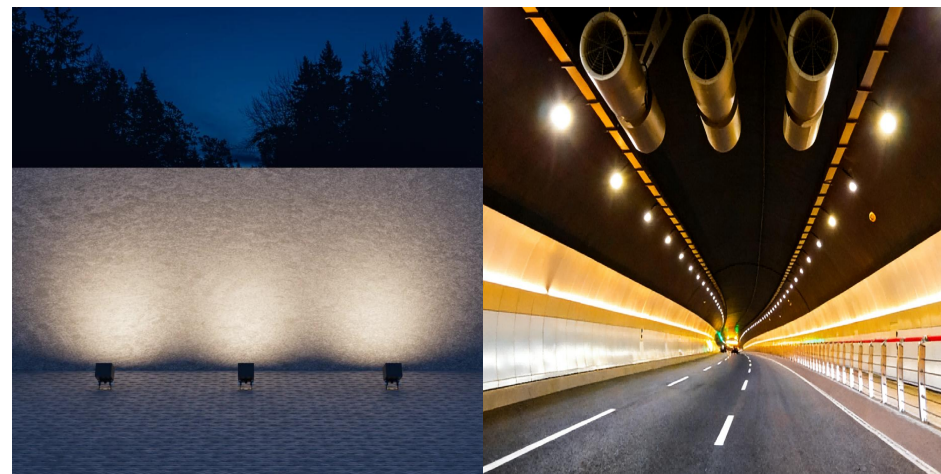

Zoom 1 Flood Lights



Integrated transparent PS panel + lens

Ensure that the light emission angle is maintained while not sacrificing brightness.



High-intensity waterproof plug

Integrated plastic + metal plug with dual waterproofing capabilities

RA>80

PF>0.9

Warranty:
2Years

Beam Angle:
90°

Material:
ALU+ABS


IP65

Watt.	Color Temp.	Lm	Unit Size
10W	6000-6500K	1000	130*112*24MM
20W	6000-6500K	2000	143*132*24MM
30W	6000-6500K	3000	164*158*24MM
50W	6000-6500K	5000	200*170*24MM
100W	6000-6500K	10000	260*217*24MM
150W	6000-6500K	15000	325*260*25MM
200W	6000-6500K	20000	375*287*25MM
300W	6000-6500K	30000	415*317*25MM
400W	6000-6500K	40000	455*347*25MM

Product application diagram



Zoom 2 Flood Lights

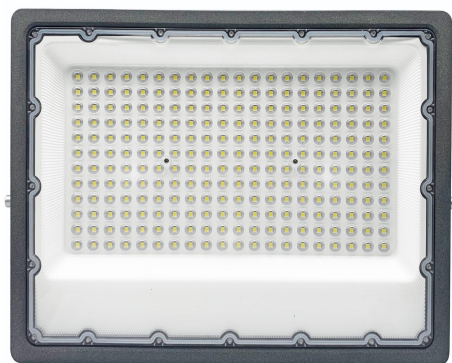

Completely sealed rubber strip

The connection points of the panel are sealed with a full-angle sealing rubber strip to ensure a watertight effect.



Backwave heat dissipation design

Employing wave-shaped heat dissipation fins to increase air flow velocity and contact area

RA>80

PF>0.9

Warranty: 2Years

Beam Angle: 120°

Material: ALU+ABS

Colour:


IP65

Watt.	Color Temp.	Lm	Unit Size
10W	6000-6500K	810	137*36*110MM
20W	6000-6500K	1620	137*36*110MM
30W	6000-6500K	2430	180*36*130MM
50W	6000-6500K	4050	200*36*155MM
100W	6000-6500K	8100	260*38*190MM
150W	6000-6500K	16200	370*38*270MM
200W	6000-6500K	24300	420*38*310MM

Product application diagram



Zoom 3 Flood Lights



Highlighting LED Chips with textured glass

The light transmittance is over 92%, ensuring the optimal performance of the LED Chips.



High-strength aluminum material

Using high-strength aluminum materials and die-casting technology to enhance the product's strength.

RA>80

PF>0.9

Warranty:
2Years

Beam Angle:
120°

Material:
ALU+Glass




Watt.	Color Temp.	Lm	Unit Size
10W	6000-6500K	1000	90*58*28MM
20W	6000-6500K	2000	110*80*28MM
30W	6000-6500K	3000	140*110*30MM
50W	6000-6500K	5000	180*125*30MM
70W	6000-6500K	7000	220*172*30MM
100W	6000-6500K	10000	260*190*30MM
150W	6000-6500K	15000	325*227*30MM
200W	6000-6500K	20000	385*263*31MM
300W	6000-6500K	30000	440*300*34MM

Product application diagram



Dash 1 Solar Flood Light



Using remote control to operate the product

It can switch between multiple modes: automatic lighting at a set time, solar light sensing, or manual switch.

Monocrystalline silicon solar panel

No need for an electrical connection. With sufficient sunlight, it can illuminate for 10-12 hours even when exposed to sunlight for 5 hours.



Charging time:
5-6Hours

Full-charge operating time
10-12Hours

Warranty:
2Years




Product application diagram

Watt.	Battery capacity	Lm	Photovoltaic Panel Power	Photovoltaic Panel Size	Unit Size
100W	6000mAh	700LM	8W DC5V	205*300*16MM	234*72*196MM
200W	10000mAh	1200LM	12W DC5V	235*350*16MM	260*80*218MM
300W	15000mAh	1900LM	18W DC5V	280*390*16MM	308*95*265MM
400W	20000mAh	2400LM	22W DC5V	360*390*16MM	356*100*285MM



Dash 2 Solar Flood Light



Using remote control to operate the product

It can switch between multiple modes: automatic lighting at a set time, solar light sensing, or manual switch.

Monocrystalline silicon solar panel

No need for an electrical connection. With sufficient sunlight, it can illuminate for 10-12 hours even when exposed to sunlight for 5 hours.



Charging time:
5-6Hours

Full-charge operating time
10-12Hours

Warranty:
2Years




Product application diagram

Watt.	Battery capacity	Lm	Photovoltaic Panel Power	Photovoltaic Panel Size	Unit Size
100W	5400mAh	600LM	8W DC5V	205*300*16MM	234*72*196MM
200W	9000mAh	900LM	12W DC5V	235*350*16MM	260*80*218MM
300W	14000mAh	1450LM	18W DC5V	280*390*16MM	308*95*265MM
400W	18000mAh	2000LM	22W DC5V	360*390*16MM	356*100*285MM



Zoom 2 Solar Flood Lights



Using remote control to operate the product

It can switch between multiple modes: automatic lighting at a set time, solar light sensing, or manual switch.

Monocrystalline silicon solar panel

No need for an electrical connection. With sufficient sunlight, it can illuminate for 10-12 hours even when exposed to sunlight for 5 hours.



Charging time:
5-6Hours

Full-charge operating time
10-12Hours

Warranty:
2Years




Product application diagram

Watt.	Battery capacity	Lm	Photovoltaic Panel Power	Photovoltaic Panel Size	Unit Size
100W	6000mAh	650LM	8W DC6V	350*235*16MM	217*180*42MM
200W	9000mAh	1100LM	12W DC6V	350*290*16MM	245*204*42MM
300W	15000mAh	1650LM	18W DC6V	400*350*16MM	270*220*42MM
400W	21000mAh	2400LM	22W DC6V	450*350*16MM	306*260*42MM
500W	27000mAh	3200LM	30W DC6V	600*350*17MM	300*45*348MM



Zoom 2 Solar Flood Lights



Using remote control to operate the product

It can switch between multiple modes: automatic lighting at a set time, solar light sensing, or manual switch.

Monocrystalline silicon solar panel

No need for an electrical connection. With sufficient sunlight, it can illuminate for 10-12 hours even when exposed to sunlight for 5 hours.



Charging time:
5-6Hours

Full-charge operating time
10-12Hours

Warranty:
2Years



Product application diagram

Watt.	Battery capacity	Lm	Photovoltaic Panel Power	Photovoltaic Panel Size	Unit Size
100W	6000mAh	650LM	8W DC6V	350*235*16MM	217*180*42MM
200W	9000mAh	1100LM	12W DC6V	350*290*16MM	245*204*42MM
300W	15000mAh	1650LM	18W DC6V	400*350*16MM	270*220*42MM
400W	21000mAh	2400LM	22W DC6V	450*350*16MM	306*260*42MM
500W	27000mAh	3200LM	30W DC6V	600*350*17MM	300*45*348MM

