

Yantai Spiral Lighting Co.,Ltd.

Headquarter Base: Zhifu District, Yantai, Shandong, China
Branch Company: Guzhen, Zhongshan, Guangdong, China
R&D Center: Shenzhen, Guangdong, China



www.spiral-lighting.com

Lighting Others
Spiralup Together ❤️

**CATALOGUE
2026**

Spiral
Lighting Co.Ltd

✉ info@spiral-lighting.com



Your trusted supply chain partner

CONTENTS



LED PANEL LIGHT

PP Panel Light	01-04
Aluminum Panel Light	05-10
Multifunctional Panel Light	11
Sensor+3CCT Multifunctional Panel Light	12
3CCT Multifunctional Panel Light	
Adjustable Power/Sensor	13-14
Double Toggle Switch Multifunctional Panel Light ..	15-16
Iron-PP Panel Light	17-18
Recessed Big Panel Light	19-20
Crystal-A Surface Aluminium Panel	21
Crystal-B Surface Aluminium Panel	22
Anti-glare Recessed Aluminium Panel	23
Anti-glare Recessed PP Panel	24

LED CEILING LIGHT

Basic Models	25-26
--------------------	-------

Premium Models	27-32
Luxury Models	33-40

LED CEILING LIGHT

G45	41
C37	41
GU10	42
A Bulb	43
T Bulb	44

LED TABLE LIGHT

DC Plug-in Models	45-49
Rechargeable Models	50-57
E27 Light Source	58

LED FLOOD LIGHT

Luna Flood Light	59-60
Apple 1 Flood Light	61-62
Apple 2 Flood Light	63-64
Apple 3 Toggle Switch Flood Lights	
(Detachable Sensor)	65-66
Zoom 1 Flood Light	67-68
Zoom 2 Flood Light	69-70

Zoom 3 Flood Light	71-72
Dash 1 Solar Flood Light	73-74
Dash 2 Solar Flood Light	75-76
Zoom 2 Solar Flood Light	77-78

LED SMART LIGHT

Smart Bulb	79-81
Smart Ceiling Light	82-87
Smart Down Light	88
Smart Track Light	89-94



LED PANEL LIGHT

With a minimalist design, uniform and soft lighting, easy installation, and energy-saving efficiency, panel lights are widely used in offices, classrooms, shopping malls, hospitals, hallways, and homes—delivering comfortable and efficient illumination for every space.



PP Panel Light
SPCEPPL-01



Recessed Round





Recessed Square



Surface Round



Surface Square

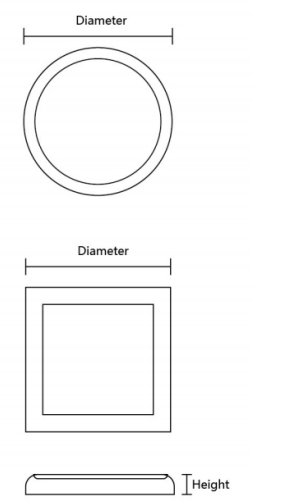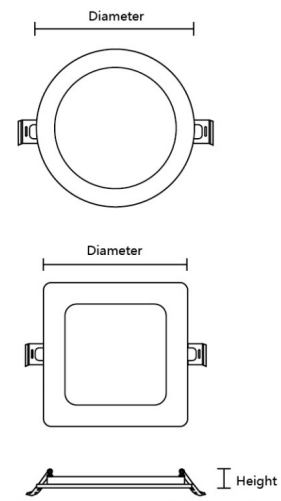


Product Parameter:

- CRI>80
- PF>0.9
- Voltage: **220-240V**
- Shell material: PP
- Diffusion plate material: PS
- Warranty: 2 years



Optional 3CCT Function:



Product Outline	Watt.	Lm/W	Driver	Unit Size(mm)		Cut-Out (mm)
				○Round	□Square	
Recessed	3W	80	Linear	Ø 98*25	/	Ø 75
	6W	90	Linear	Ø 117*25	120*120*27	Ø 95
	9W	90	Linear	Ø 140*25	145*145*27	Ø 115
	12W	100	Linear	Ø 177*25	175*175*27	Ø 145
	18W	100	Linear	Ø 220*28	225*225*29	Ø 180
	24W	100	Linear	Ø 290*28	289*289*29	Ø 260
Surface	6W	90	Linear	Ø 123*32	123*123*32	/
	12W	100	Linear	Ø 175*32	175*175*32	/
	18W	100	Linear	Ø 226*32	226*226*32	/
	24W	100	Linear	Ø 289*32	289*289*32	/



PP Panel Light SPENPPL-01



Recessed Round







Recessed Square



Surface Round



Surface Square



Product Parameter:

- CRI>80
- PF>0.5/0.9
- Voltage: 100-240V
- Shell material: PP
- Diffusion plate material: PS
- Warranty: 2 years

Shell
color
options



Optional 3CCT Functions:



Toggle /Wall
Switch

Product Outline	Watt.	Lm/W	Driver	Unit Size (mm)		Cut-Out (mm)
				○Round	□Square	
Recessed	3W	80	Linear	∅ 98*25	/	∅ 75
	6W	90	Linear	∅ 117*25	120*120*27	∅ 95
	9W	90	Linear	∅ 140*25	145*145*27	∅ 115
	12W	100	Linear	∅ 177*25	175*175*27	∅ 145
	18W	100	Linear	∅ 220*28	225*225*29	∅ 180
	24W	100	Linear	∅ 290*28	289*289*29	∅ 260
Surface	6W	90	Linear	∅ 123*32	123*123*32	/
	12W	100	Linear	∅ 175*32	175*175*32	/
	18W	100	Linear	∅ 226*32	226*226*32	/
	24W	100	Linear	∅ 289*32	289*289*32	/



Aluminum Panel Light SPENAPL-01



Recessed Round



Recessed Square






Surface Round



Surface Square



Recessed Panel Back Side



Product Parameter:

- CRI>80
- PF>0.5
- Voltage: 120-240V/85-265V
- Non-isolated Driver/Isolated Driver
- Warranty: 2 years
- Shell material: Aluminum
- Diffusion plate material: **Glass/PS**



Product Outline	Watt.	Lm/W	Unit Size (mm)	Cut-Out (mm)
Recessed Round	3W	35	Ø 82	Ø 75
	6W	45	Ø 116	Ø 105
	9W	50	Ø 143	Ø 135
	12W	55	Ø 168	Ø 155
	18W	60	Ø 220	Ø 200
	24W	65	Ø 295	Ø 280
Recessed Square	3W	35	90*90	75*75
	6W	45	120*120	105*105
	9W	50	145*145	135*135
	12W	55	168*168	155*155
	18W	60	220*220	205*205
	24W	65	292*292	280*280
Surface Round (H32mm)	6W	45	Ø 112	/
	12W	55	Ø 162	/
	18W	60	Ø 211	/
	24W	65	Ø 289	/
Surface Square (H32mm)	6W	45	Ø 111	/
	12W	55	Ø 164	/
	18W	60	Ø 211	/
	24W	65	Ø 284	/
Surface Round (H28mm)	6W	45	Ø 112	/
	12W	55	Ø 162	/
	18W	60	Ø 211	/
	24W	65	Ø 289	/
Surface Square (H28mm)	6W	45	Ø 111	/
	12W	55	Ø 164	/
	18W	60	Ø 211	/
	24W	65	Ø 284	/
Surface Round (H24mm)	6W	45	Ø 112	/
	12W	55	Ø 162	/
	18W	60	Ø 211	/
	24W	65	Ø 289	/
Surface Square (H24mm)	6W	45	Ø 111	/
	12W	55	Ø 164	/
	18W	60	Ø 211	/
	24W	65	Ø 284	/




Aluminum Panel Light SPCEAPL-02



Recessed
Round



Recessed
Square

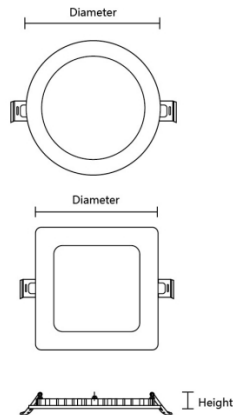

Surface Round



Surface Square



Recessed Panel Back Side



Product Parameter:



- CRI>80
- PF>0.5/0.9
- Voltage: **220-240V**
- Non-isolated Driver
- Warranty: 2 years
- Shell material: Aluminum
- Diffusion plate material: PS

Product Outline	Watt.	Number of LED Beads	Lm/W	Unit Size (mm)	Cut-Out (mm)
Recessed Round	3W	15	35	Ø 90	Ø 72
	6W	30	50	Ø 120	Ø 105
	9W	46	55	Ø 150	Ø 130
	12W	60	60	Ø 170	Ø 153
	18W	90	65	Ø 225	Ø 203
	24W	120	70	Ø 300	Ø 278
Recessed Square	3W	15	35	90*90	Ø 73
	6W	30	50	120*120	Ø 102
	9W	44	55	150*150	Ø 130
	12W	60	60	170*170	Ø 151
	18W	90	65	225*225	Ø 200
	24W	120	70	300*300	Ø 272
Surface Round (H32mm)	6W	30	50	Ø 120	/
	12W	60	60	Ø 170	/
	18W	90	65	Ø 225	/
	24W	150	70	Ø 300	/
Surface Square (H32mm)	6W	30	50	120*120	/
	12W	60	60	170*170	/
	18W	90	65	225*225	/
	24W	150	70	300*300	/
Surface Round (H35mm)	6W	30	50	Ø 120	/
	12W	60	60	Ø 174	/
	18W	90	65	Ø 225	/
	24W	150	70	Ø 300	/
Surface Square (H35mm)	6W	30	50	120*120	/
	12W	60	60	174*174	/
	18W	90	65	225*225	/
	24W	150	70	300*300	/





Aluminum Panel Light SPCEAPL-01



Recessed Round



Recessed Square



Surface Round



Surface Square



Recessed Panel Reverse Side



Product Parameter:

- CRI>80
- PF>0.9
- Voltage: **220-240V**
- Non-isolated Driver
- Warranty: 2 years
- Shell material: Aluminum
- Diffusion plate material: PS



Optional Functions:



Toggle / Wall
Switch 3CCT



Infrared Sensors



Double Toggle
3CCT&Wattage

Product Outline	Watt.	Lm/W	Unit Size (mm)	Cut-Out (mm)
Recessed Round	3W	35	Ø 82	Ø 68
	6W	60	Ø 119	Ø 103
	9W	65	Ø 146	Ø 130
	12W	70	Ø 168	Ø 150
	18W	80	Ø 221	Ø 202
	24W	80	Ø 297	Ø 280
Recessed Square	3W	35	84*84	68*68
	6W	60	118*118	103*103
	9W	65	146*146	130*130
	12W	70	166*166	150*150
	18W	80	216*216	205*205
	24W	80	290*290	280*280
Surface Round (H32mm)	6W	60	Ø 112	/
	12W	70	Ø 162	/
	18W	80	Ø 211	/
	24W	80	Ø 289	/
Surface Square (H32mm)	6W	60	111*111	/
	12W	70	164*164	/
	18W	80	211*211	/
	24W	80	284*284	/



Multifunctional Panel Light



Product Parameter:

- CRI>80
- PF>0.5/0.9
- Voltage: 100-265V
- Warranty: 2 years
- Shell material: Aluminum
- Diffusion plate material: PS



Surface/Recessed
Integration



Adjustable
recessed size



Toggle / Wall
Switch 3CCT



Radar Sensors

Watt.	Lm	Unit Size (mm)	
		○Round	□Square
9W	630	∅ 155*20	155*155*20
12W	960	∅ 175*20	175*175*20
18W	1620	∅ 225*20	225*225*20
24W	2160	∅ 300*20	300*300*20



Sensor+3CCT Multifunctional Panel Light



Product Parameter:

- Watt.: 18W
- CRI>80
- PF>0.9
- Luminous flux: 1440lm
- Voltage: 100-265V
- Warranty: 2 years
- Shell material: Aluminum
- Diffusion plate material: PS
- Unit Size: ∅ 224*20mm(Without sensor head)



Toggle Switch
3CCT



Infrared Sensors



3CCT Multifunctional Panel Light Adjustable Power/Sensor



Toggle Switch
3CCT

Optional One



Wall Switch
Change Wattage



Optional Two



Infrared Sensors



Product Parameter:






- CRI>80
- PF>0.7/0.9
- Voltage: **220-240V**
- Warranty: 2 years
- Shell material: ABS
- Diffusion plate material: PS

Watt.	Lm	Unit Size(mm)	PF
15W	1240	Ø 190*25	>0.7
18W	1440	Ø 230*25	>0.7
24W	1920	Ø 300*25	>0.7
30W	2500	Ø 400*25	>0.9
15W	1240	Ø 190*25	>0.7
18W	1440	Ø 230*25	>0.7
24W	1920	Ø 300*25	>0.7
30W	2500	Ø 400*25	>0.9

Watt.	Lm	Unit Size(mm)	PF
15W	1240	Ø 190*25	>0.7
18W	1440	Ø 230*25	>0.7
24W	1920	Ø 300*25	>0.7
15W	1240	Ø 190*25	>0.7
18W	1440	Ø 230*25	>0.7
24W	1920	Ø 300*25	>0.7



Double Toggle Switch Multifunctional Panel Light



Product Parameter:




- CRI>80
- PF>0.7/0.9
- Voltage: **220-240V**
- Shell material: PP
- Diffusion plate material: PS

Watt.	Lm	Adjustable Power	Unit Size (mm)	Cut-Out (mm)
6W	420	/	Ø 146*17	55-100
12W	960	6/9/12W	Ø 170*17	55-120
18W	1620	6/12/18W	Ø 226*17	55-180
24W	2160	12/18/24W	Ø 301*17	55-250



Double Toggle Switch Multifunctional Panel Light



Product Parameter:

- CRI>80
- PF>0.7
- Voltage: 170-265V
- Shell material: PC
- Diffusion plate material: PS

Watt.	Lm	Adjustable Power	Unit Size(mm)
12W	1200	8/10/12W	Ø 180x17
18W	1800	12/15/18W	Ø 218x17
24W	2400	16/20/24W	Ø 300x17
32W	3200	24/28/32W	Ø 380x17
40W	4000	32/36/40W	Ø 480x17



Iron-PP Panel Light SPENIPL-01



Recessed Round



Recessed Square





Surface Round



Surface Square



Recessed Panel Back Side

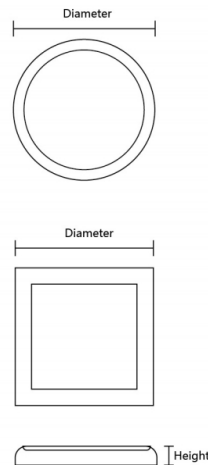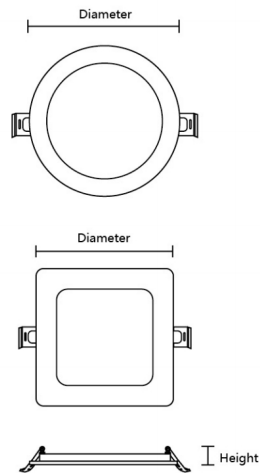

Product Parameter:

- CRI>80
- PF>0.5
- Voltage: 100-265V/180-265V
- Shell material: Iron+PP
- Diffusion plate material: PS
- Warranty: 2 years

Optional Functions:






Toggle Switch
3CCT

Product Outline	Watt.	Lm/W	Driver	Unit Size(mm)		Cut-Out (mm)
				○Round	□Square	
Recessed	6W	40	DOB	Ø 118*25	118*118*25	Ø 95
	12W	65	DOB	Ø 165*25	165*165*25	Ø 145
	18W	65	DOB	Ø 215*25	215*215*25	Ø 195
	24W	70	DOB	Ø 290*25	290*290*25	Ø 270
Surface	6W	40	DOB	Ø 110*28	110*110*28	/
	12W	65	DOB	Ø 158*28	158*158*28	/
	18W	65	DOB	Ø 210*28	210*210*28	/
	24W	70	DOB	Ø 278*28	278*278*28	/
	32W	75	DOB	Ø 278*28	278*278*28	/



Recessed Big Panel Light

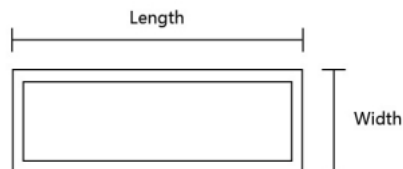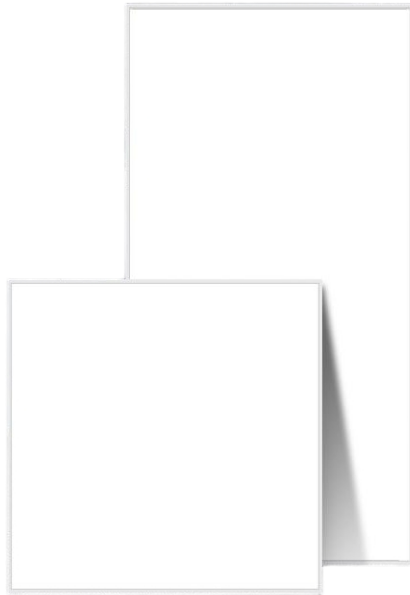

Product Information:

- Multiple sizes and parameters are available for selection.
- Product certification has been achieved through CE, RoHS and ERP.
- Back-lit/Side-lit
- PF>0.5/0.9
- Voltage: 100-240V/**220V-240V**
- Material: Alum/Iron/PP
- Warranty: 2 years

Product Parameter:

Product Code	Watt.	Lighting Method	Driver	Lm/W	CRI	Color Temp.	Unit Size (mm)
SPLFBPL-01	40W	Back-lit	Non-isolated	80-120	80	3000K/4000K/6500K	595*595*30
	72W	Back-lit	Non-isolated	80-120	80	3000K/4000K/6500K	1195*595*30
SPLFBPL-02	40W	Back-lit	Non-isolated	80-120	80	3000K/4000K/6500K	595*595*30
	72W	Back-lit	Non-isolated	80-120	80	3000K/4000K/6500K	1195*595*30
SP3CBPL-01	40W	Back-lit	Non-isolated	80-120	80	Wall Switch 3CCT	595*595*30
	72W	Back-lit	Non-isolated	80-120	80	Wall Switch 3CCT	1195*595*30
SPSIBPL-01	40W	Side-lit	Non-isolated	80-120	80	3000K/4000K/6500K	595*595
	70W	Side-lit	Non-isolated	80-120	80	3000K/4000K/6500K	595*1195
	64W	Side-lit	Isolated	80-120	80	3000K/4000K/6500K	595*595



Crystal-A Surface Aluminium Panel



Wall Switch
3CCT

Product Parameter:



- CRI>80
- PF>0.5/0.9
- Voltage: 110-240/**220-240V**
- Shell material: Alu+PC

Watt.	Unit Size(mm)		Lm/W
	○Round	□Square	
6W	Ø 90	90*90	100
12W	Ø 120	120*120	
18W	Ø 180	180*180	
24W	Ø 220	220*220	
36W	Ø 300	300*300	

Crystal-B Surface PP Panel



Toggle Switch
3CCT

Product Parameter:

- CRI>80
- PF>0.5/0.9
- Voltage: 185-265V/**220-240V**
- Shell material: PP
- Diffusion plate material: PC

Watt.	Unit Size(mm)		Driver	Lm/W
	○Round	□Square		
12W	Ø 120*38	120*120*38	DOB	100
18W	Ø 175*38	175*175*38		
24W	Ø 215*38	215*215*38		
36W	Ø 295*38	295*295*38		



Anti-glare Recessed Aluminium Panel




Product Parameter:

- CRI>80
- PF>0.5/0.9
- Voltage: 110-240/220-240V
- Shell material: Aluminum
- Diffusion plate material: PC




Optional Configuration:



Watt.	Unit Size(mm)		Driver	Lm/W
	○Round	□Square		
12W	∅ 140*40	140*140*40	Non-isolated	100
18W	∅ 170*40	170*170*40		
24W	∅ 220*40	220*220*40		




Anti-glare Recessed PP Panel

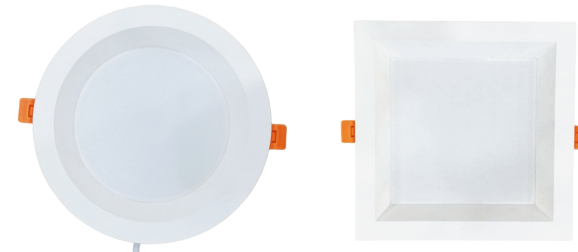

Product Parameter:

- CRI>80
- PF>0.5/0.9
- Voltage: 175-265V
- Shell material: ABS
- Diffusion plate material: PP

Optional Configuration:



Watt.	Lm/w	Driver	Unit Size(mm)		Cut-out (mm)
			○Round	□Square	
12W	70	DOB	∅ 150*40	150*150*40	125
18W	80	DOB	∅ 181*40	180*180*40	155
24W	80	DOB	∅ 215*40	215*215*40	185



LED CEILING LIGHT

Available in patterned and minimalist styles to meet diverse needs, these ceiling lights are easy to install, deliver soft and uniform illumination, and are energy-efficient and durable. Widely suitable for living rooms, bedrooms, hallways, hotels, restaurants, and other residential or commercial spaces—offering reliable and warm lighting for everyday life.



Basic Models



Model:SP1306-STM

Watt.:24W/36W/48W
Size:350/400/500mm



Model:SP1303-ST

Watt.:24W/36W/48W
Size:350/400/500mm



Model:SP1311-ST

Watt.:36W/48W
Size:400/500mm



Model:SP1317-ST

Watt.:24W/36W/48W
Size:350/400/500mm



Model:SP1117-ST

Watt.:24W/36W/48W
Size:350/400/500mm



Model:SP1316-ST

Watt.:24W/36W/48W
Size:350/400/500mm



Model:SP1318-ST

Watt.:24W/36W/48W
Size:350/400/500mm



Model:SP1306-STM1

Watt.:24W/36W/48W
Size:350/400/500mm



Model:SP1319-W

Watt.:24W/36W/48W
Size:350/400/500mm



Model:SP1236-ST

Watt.:24W/36W/48W
Size:350/400/500mm



Model:SP1263-ST

Watt.:36W/48W
Size:400/500mm



Model:SP1264-ST

Watt.:24W/36W/48W
Size:350/400/500mm



Model:SP1135-W

Watt.:24W/36W/48W
Size:350/400/500mm



Premium Models



Model:SP1158-ST

Watt.:24W/36W/48W
Size:350/400/500mm



Model:SP1283-ST

Watt.:36W/48W
Size:400/500mm



Model:SP1346WTTT

Watt.:24W/36W/48W
Size:350/400/500mm



Model:SP1239A-STTT

Watt.:24W/36W/48W
Size:350/400/500mm



Model:SP1303WTHT

Watt.:24W/36W/48W
Size:350/400/500mm



Model:SPBK-STWT

Watt.:24W/36W/48W
Size:350/400/500mm



Model:SP1343WTHT

Watt.:24W/36W/48W
Size:350/400/500mm



Model:SP1250-ST

Watt.:24W/36W/48W
Size:350/400/500mm



Model:SP1173-ST

Watt.:24W/36W/48W
Size:350/400/500mm



Model:SP1259-STTT

Watt.:24W/36W/48W
Size:350/400/500mm



Model:SP1344WT3D

Watt.:24W/36W/48W
Size:350/400/500mm



Model:SP1225WT

Watt.:24W/36W/48W
Size:350/400/500mm



Model:SP1227-ST

Watt.:24W/36W/48W
Size:350/400/500mm




Model:SP1290-STSL

Watt.:24W/36W/48W
Size:350/400/500mm



Model:SP1291A-STWT

Watt.:24W/36W/48W
Size:350/400/500mm



Model:SP1221WT

Watt.:24W/36W/48W
Size:350/400/500mm



Model:SP1304-ST

Watt.:24W/36W/48W
Size:350/400/500mm



Model:SPBL-ST

Watt.:24W/36W/48W
Size:350/400/500mm



Model:SP1328-STHQ

Watt.:24W/36W/48W
Size:350/400/500mm



Model:SP1347WT

Watt.:24W/36W/48W
Size:350/400/500mm



Model:SP1230-ST

Watt.:24W/36W/48W
Size:350/400/500mm



Model:SP1261WTH

Watt.:24W/36W/48W
Size:350/400/500mm




Model:SP1138D-STWT

Watt.:24W/36W/48W
Size:350/400/500mm



Model:SP1138D-STTT

Watt.:24W/36W/48W
Size:350/400/500mm



Model:SP1253DWT

Watt.:24W/36W/48W
Size:350/400/500mm



Model:SP1191-ST1

Watt.:24W/36W/48W
Size:350/400/500mm



Model:SP1249-ST1

Watt.:24W/36W/48W
Size:350/400/500mm



Model:SP1156-ST1

Watt.:24W/36W/48W
Size:350/400/500mm



Model:SP1135WTTT

Watt.:24W/36W/48W
Size:350/400/500mm



Model:SP1258A-STTT

Watt.:24W/36W/48W
Size:350/400/500mm



Model:SP1215B-STWT

Watt.:24W/36W/48W
Size:350/400/500mm



Model:SP1338WT

Watt.:24W/36W/48W
Size:350/400/500mm




Model:SP1261WTH

Watt.:24W/36W/48W
Size:350/400/500mm



Model:SP1320A-STWT

Watt.:24W/36W/48W
Size:350/400/500mm



Model:SP1321WTH

Watt.:36W/48W
Size:400/500mm



Model:SP1316A-STTT

Watt.:36W/48W
Size:400/500mm



Model:SP1316A-STWT

Watt.:36W/48W
Size:400/500mm



Model:SP2107C-STTT

Watt.:36W/48W
Size:400/500mm



Model:SP2107WTTT

Watt.:36W/48W
Size:400/500mm



Model:SP1300A-STWT

Watt.:36W/48W
Size:400/500mm



Model:SP1303A-STWT

Watt.:36W/48W
Size:400/500mm



Model:SP1343A-STWT

Watt.:36W/48W
Size:400/500mm



Model:SP2067-STGD

Watt.:36W/48W
Size:400/500mm



Model:SP1259A-STTT

Watt.:36W/48W
Size:400/500mm



Model:SP2111A-STTT

Watt.:36W/48W
Size:400/500mm



Model:SP1343A-STTT

Watt.:36W/48W
Size:400/500mm



Model:SP1346A-STWT

Watt.:36W/48W
Size:400/500mm



Model:SP1340A-STWT

Watt.:36W/48W
Size:400/500mm



Model:SP2092FLHT

Watt.:36W/48W
Size:400/500mm



Model:SP1290BWTTT

Watt.:36W/48W
Size:400/500mm




Model:SP1305AWTGD

Watt.:36W/48W
Size:400/500mm



Model:SPYZ-ST

Watt.:36W/48W
Size:400/500mm



Model:SP1317B-STWT

Watt.:36W/48W
Size:400/500mm



Model:SP1239A-STWT

Watt.:36W/48W
Size:400/500mm



Luxury Models



Model:SP2112-CV

Watt.:36W/48W
Size:400/500mm



Model:SP1347-DPR

Watt.:36W/48W
Size:400/500mm



Model:SP1226-D

Watt.:36W/48W
Size:400/500mm



Model:SP1348A-ST

Watt.:36W/48W
Size:400/500mm



Model:SP1348A-ST

Watt.:36W/48W
Size:400/500mm



Model:SP2102-ST

Watt.:36W/48W
Size:400/500mm



Model:SP1344-PR

Watt.:36W/48W
Size:400/500mm




Model:SP1354-STB

Watt.:36W/48W
Size:400/500mm



Model:SP1354-STs

Watt.:36W/48W
Size:400/500mm



Model:SP2043-ST

Watt.:36W/48W
Size:400/500mm



Model:SP2038A-ST

Watt.:36W/48W
Size:400/500mm



Model:SP2044-CVS

Watt.:36W/48W
Size:400/500mm



Model:SP1329A-ST

Watt.:36W/48W
Size:400/500mm



Model:SP1344B-ST

Watt.:36W/48W
Size:400/500mm



Model:SP1348A-ST

Watt.:36W/48W
Size:400/500mm



Model:SP2039A-3ST

Watt.:36W/48W
Size:400/500mm



Model:SP2026B-ST

Watt.:36W/48W
Size:400/500mm



Model:SP1348-ST

Watt.:36W/48W
Size:400/500mm



Model:SP1337A-ST

Watt.:36W/48W
Size:400/500mm



Model:SP1351C-STW

Watt.:36W/48W
Size:400/500mm



Model:SP1351C-STG

Watt.:36W/48W
Size:400/500mm



Model:SP1295B-STW

Watt.:36W/48W
Size:400/500mm



Model:SP1295B-STT

Watt.:36W/48W
Size:400/500mm



Model:SP1274A-STT

Watt.:36W/48W
Size:400/500mm



Model:SP1351C-STT

Watt.:36W/48W
Size:400/500mm



Model:SP1348B-STG

Watt.:36W/48W
Size:400/500mm



Model:SP1348B-STW

Watt.:36W/48W
Size:400/500mm



Model:SP1274A-STG

Watt.:36W/48W
Size:400/500mm



Model:SP1351B

Watt.:36W/48W
Size:400/500mm



Model:SP2106-ST

Watt.:36W/48W
Size:400/500mm



Model:SP1348B-STT

Watt.:36W/48W
Size:400/500mm



Model:SP1339B-STs

Watt.:36W/48W
Size:400/500mm



Model:SP1339B-STG

Watt.:36W/48W
Size:400/500mm



Model:SP2106-FL

Watt.:36W/48W
Size:400/500mm



Model:SP2101E-ST

Watt.:36W/48W
Size:400/500mm



Model:SP2105

Watt.:36W/48W
Size:400/500mm



Model:P2070-D

Watt.:36W/48W
Size:400/500mm



Model:SP1323G

Watt.:36W/48W
Size:400/500mm



Model:SP1323Q

Watt.:36W/48W
Size:400/500mm



Model:SP1197H

Watt.:36W/48W
Size:400/500mm



Model:SP1313H

Watt.:36W/48W
Size:400/500mm



Model:SP1212H

Watt.:36W/48W
Size:400/500mm



Model:SP1323T

Watt.:36W/48W
Size:400/500mm



Model:SP1276Q

Watt.:36W/48W
Size:400/500mm



Model:SP1276H

Watt.:36W/48W
Size:400/500mm



Model:SP1212Q

Watt.:36W/48W
Size:400/500mm



Model:SP8167-DY

Watt.:36W/48W
Size:400/500mm



Model:SP8167-D

Watt.:36W/48W
Size:400/500mm



Model:SP1193H

Watt.:36W/48W
Size:400/500mm



Model:SP1193Q

Watt.:36W/48W
Size:400/500mm



Model:SP1197Q

Watt.:36W/48W
Size:400/500mm



Model:SP1347-B

Watt.:36W/48W
Size:400/500mm



Model:SP1347-T

Watt.:36W/48W
Size:400/500mm



Model:SP1259-ST

Watt.:36W/48W
Size:400/500mm



Model:SP1340-T

Watt.:36W/48W
Size:400/500mm



Model:SP1221-ST

Watt.:36W/48W
Size:400/500mm



Model:SP8154

Watt.:36W/48W
Size:400/500mm



Model:SP2110-M

Watt.:36W/48W
Size:400/500mm



Model:SP2069E-D

Watt.:36W/48W
Size:400/500mm



Model:SP2036-W

Watt.:36W/48W
Size:400/500mm



Model:SP8153

Watt.:36W/48W
Size:400/500mm



Model:SP8152

Watt.:36W/48W
Size:400/500mm



Model:SP8151

Watt.:36W/48W
Size:400/500mm



Model:SP1337-DPR

Watt.:36W/48W
Size:400/500mm



Model:SP1225-PR

Watt.:36W/48W
Size:400/500mm



Model:SP1259-PR

Watt.:36W/48W
Size:400/500mm



Model:SP2109-D

Watt.:36W/48W
Size:400/500mm




Model:SP2108-D

Watt.:36W/48W
Size:400/500mm



Model:SP2108-DS

Watt.:36W/48W
Size:400/500mm



Model:SP1069-D

Watt.:36W/48W
Size:400/500mm



Model:SP2113A-ST

Watt.:36W/48W
Size:400/500mm




Model:SP2105-DPR

Watt.:36W/48W
Size:400/500mm




LED bulbs are energy-efficient, long-lasting, low in heat emission, instant-on, and flicker-free. They offer a variety of color temperatures and are easy to install, directly replacing traditional incandescent bulbs. Ideal for a wide range of indoor lighting applications—including homes (e.g., living rooms, bedrooms, kitchens), offices, retail stores, hotels, and public spaces—LED bulbs are an economical and eco-friendly lighting upgrade.




Watt.: 5W
 Base Type: E27/B22
 Voltage: 110-265V
 Lumen: 427lm
 PF: 0.5
 Driver: DOB
 Material: PBT+PC
 Unit Size: $\Phi 45 \times 78$ mm

G45



Watt.: Voltage: 110-240v
 CRI: 80
 Base: GU10
 PF: >0.5
 Housing Material: Plastic+Aluminum
 Beam Angle: 38°
 Lumen: 570lm
 Driver: DOB
 Unit Size: $\Phi 50 \times 56$ mm

GU10

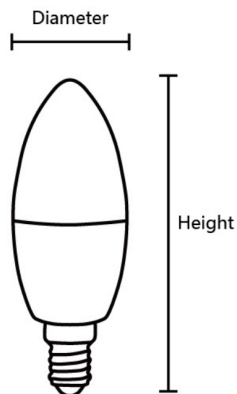

Watt.: 5W
 Base Type: E27/E14/E12/B22
 Voltage: 110-265V
 Lumen: 486lm
 PF: 0.5
 Driver: DOB
 Material: PBT+PC
 Unit Size: $\Phi 37 \times 106$ mm

C37




Base Type



E27

B22

E14

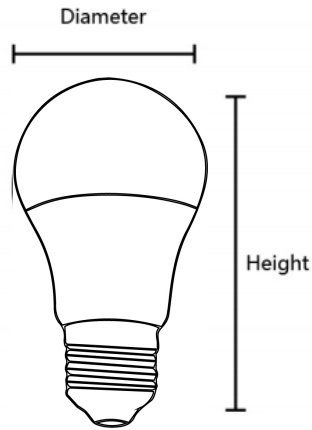

A Bulb

Base Type



E27

B22


Warranty:
2Years

Model	Watt.	Voltage	Lumen	PF	Driver	Unit Size(mm)
A50	5W	165-240V/110-240V	467	0.9	DOB	Φ50*90
A60	7W	165-240V/110-240V	595	0.5	DOB	Φ60*110
A60	9W	165-240V/110-240V	765	0.5	DOB	Φ60*110
A60	9W	110-130V	720	0.5	Linear	Φ60*106
A60	12W	165-240V/110-240V	1020	0.5	DOB	Φ60*118
A70	15W	165-240V/110-240V	1211	0.5	DOB	Φ70*135
A80	18W	165-240V/110-240V	1530	0.5	DOB	Φ80*150
A95	23W	165-240V/110-240V	2000	0.5	DOB	Φ95*160

T Bulb
High CoverT Bulb
Short Cover

Model	Watt.	Voltage	Lumen	PF	Driver	Material	Unit Size(mm)	
							High Cover	Short Cover
T80	20W	110-240V	1800	0.5	DOB	PBT+PP	Φ80*125	Φ80*116
		165-240V	1800	0.5	DOB	PBT+PP	/	Φ80*116
T100	30W	110-240v	2500	0.5	DOB	PBT+PP	Φ100*148	Φ100*141
		165-240V	2500	0.5	DOB	PBT+PP	/	Φ100*141
T125	40W	110-240v	3600	0.5	DOB	PBT+PP	Φ120*171	Φ125*166
		165-240V	3600	0.5	DOB	PBT+PP	/	Φ125*166
T135	50W	110-240V	4500	0.5	DOB	PBT+PP	/	Φ135*177
T140	50W	110-240V	4500	0.5	DOB	PBT+PP	Φ140*194	Φ140*177
		165-240V	4500	0.5	DOB	PBT+PC	/	Φ140*177
T160	65W	165-240V	5300	0.5	DOB	PBT+PC	/	Φ160*283
T160	80W	110-240V	7200	0.5	DOB	PBT+PC	/	Φ160*283
T180	100W	110-240V	7200	0.5	DOB	PBT+PC	/	Φ180*260



LED TABLE LIGHT

LED table lights offer advantages such as energy efficiency, long lifespan, and soft, flicker-free light, providing greater eye comfort. They are widely suitable for desk studying, office lighting, bedside reading, and home decoration, making them an ideal choice for modern, healthy illumination.



DC Plug-in Models

**Model:SPMT-752**

10W 360Lm 3CCT
ABS+silicone
CRI: >80
16*36*16CM

**Model:SPMT-6622**

18W 450Lm 3CCT
Aluminum+Iron+Plastic
CRI: >95
23*7*43CM

**Model:SPTBWY1**

5W 300Lm 3CCT
ABS+Iron
CRI: >80
47.5*32*48cm

**Model:SPMT-813**

5W 300Lm 3CCT
Aluminum+Iron+Plastic
CRI: >80
18*16*24.2CM

**Model:SPMT-623**

5W 300Lm 3CCT
Aluminum+Iron+Plastic
CRI: >80
15.5*6*35.2CM

**Model:SPMT-817**

5W 360Lm 3CCT
Aluminum+Iron+Plastic
CRI: >80
17*11*28CM

**Model:SPMT-856**

6W 273Lm 3CCT
Aluminum+Iron+Plastic
CRI: >80
11.5*4*41CM
Wireless output: 5W

**Model:SPMT-856S**

6W 360Lm 3CCT
Aluminum+Iron+Plastic
CRI: >80
11.5*4*41CM
Wireless output: 5W







DC Plug-in Models

**Model:SPDLWC02**

5W + 8W 400lm 3CCT
ABS+PC
CRI: >80
16*16*36cm
Wireless output:
5W/8W

**Model:SPMT-857**

6W 360Lm 3CCT
Aluminum+Iron+Plastic
CRI: >80
11.5*4*43.5CM
Wireless output: 5W

**Model:SPDLWC33**

5W + 15W 480Lm 3CCT
ABS+PC
CRI: >80
17*11*28CM
Wireless output:
5W/10W/15W

**Model:SPMT-868**

6W 273Lm 3CCT
Aluminum+Iron+Plastic
CRI: >80
11.5*4*41CM
Wireless output: 5W

**Model:SPDLWC03**

5W + 8W 400Lm 3CCT
ABS+PC
CRI: >80
17*11*28CM: 5W/8W

**Model:SPDLZD01**

5W + 15W 480Lm 3CCT
ABS+PC
CRI: >80
16*6*35CM
Wireless output:
5W/10W/15W

**Model:SPDLWC36**

5W + 15W 480Lm 3CCT
ABS+PC
CRI: >80
17*11*28CM
Wireless output:
5W/10W/15W





DC Plug-in Models

**Model:SPMT-898**


6W 360Lm 3CCT
Aluminum+Iron+Plastic
CRI: >80
15.5*4*41CM
Wireless output: 5W

**Model:SPMT-815**

5W 300Lm 3CCT
Aluminum+Iron+Plastic
CRI: >80
17*11*28CM

**Model:SPR82**

5W 360Lm 3CCT
Aluminum+Iron+Plastic
CRI: >80
18*16*24.2CM

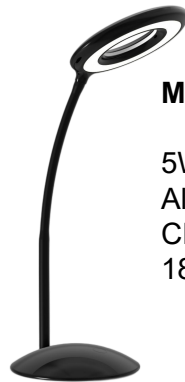**Model:SPMT-816**

5W 360Lm 3CCT
Aluminum+Iron+Plastic
CRI: >80
18*16*24.2CM



Rechargeable Models

**Model:SPMT-713**

5W 300Lm 3CCT
Aluminum+Iron+Plastic
CRI: >80
15.5*6*35.2CM

**Model:SPENB1**

5W 300Lm 3CCT
Aluminum+Iron+Plastic
CRI: >80
17*11*28CM

**Model:SPDQ-CX01**

2W 200Lm 6500K
Iron + ABS plastic
CRI: >80
12*12*38CM

**Model:SPR01-1**

1.5W 100Lm 3CCT
Polycarbonate+Aluminum
+Iron
CRI: >80
11*11*37.5CM



**Model:SPT10-1
(BD-A58)**

5W 60Lm 3CCT
ABS+Iron
CRI: >80
12*12*33CM

**Model:SPT13**

5W 60Lm 3CCT
Iron+Acrylic
CRI: >80
12*12*35CM

**Model:SPR01-1**

1.5W 100Lm 3CCT
PC+Aluminum+Iron
CRI: >80
11*11*37.5CM

**Model:SPT09
(BD-A75)**

5W 60Lm 3CCT
Aluminum+Leather
+Acrylic
CRI: >80
11*11*27CM

**Model:SPBD-A20**

5W 100Lm 3CCT
Iron+Acrylic
CRI: >80
12.5*12.5*27CM

**Model:SPT10(BD-A58)**

5W 60Lm 3CCT
ABS+Iron
CRI: >80
12*12*33CM



**Model:SPR02**

1.5W 100Lm 3CCT
PC+Aluminum
CRI: >80
8*8*31CM

**Model:SPBD-A14**

2.2W 180Lm 3CCT
Brass+PC+Glass+Iron
CRI: >80
12*12*20CM

**Model:SPBD-A16**

5W 60Lm 3CCT
Iron+Acrylic
CRI: >80
8*8*34CM

**Model:SPR03**

11*11*37.5CM
1.5W 100Lm 3CCT
PC + Aluminum + Iron
CRI: >80



**Model:SPT17**

5W 60Lm 3CCT
Iron+Acrylic
CRI: >80
13*13*38CM

**Model:SPBD-A26**

5W 100Lm 3CCT
Iron + Acrylic
CRI: >80
12.5*12.5*21.5CM

**Model:SPBD-A22**

5W 110Lm 3CCT
ABS+PS+Iron
CRI: >80
11*11*32CM

**Model:SPJK-CTD01**

3W 200Lm 3CCT
Aluminum + ABS plastic
CRI: >80
4*4*11CM



**Model:SPBD-A28**

5W 120Lm 3CCT
ABS+PS+Iron
CRI: >80
19*19*31CM

**Model:SPBD-A77**

5W 60Lm 3CCT
Iron+Acrylic
CRI: >80
5*15*22CM

**Model:SPBD-A27**

5W 120Lm 3CCT
Iron+Acrylic
CRI: >80
15.5*15.5*20.5CM

**E27 Light Source****Model:SPRG-25409**

12*15*35CM

**Model:SPTB1**
16*16*26.5CM**Model:SPTB2**
19.3*9*39.9CM

**No light source included.
Use with E27 bulbs.**






LED FLOOD LIGHT

Spiral Lighting's curated floodlight collection features a variety of models—including AC-powered, toggle-switch, sensor-activated, and solar floodlights—to meet diverse lighting needs. Ideal for both indoor and outdoor applications such as courtyards, garages, perimeter walls, stairwells, and gardens, these floodlights combine safety, energy efficiency, and convenience, making them a perfect choice for residential and commercial lighting.



Luna Flood Light



Watt.	Color Temp.	Lm	Driver	Unit Size(mm)
10W	2800K/4000K/6500K	800	Linear	99*76*33.1
20W	2800K/4000K/6500K	1600	Linear	99*76*33.1
30W	2800K/4000K/6500K	2400	Linear	133*99*31
50W	2800K/4000K/6500K	4000	Linear	173*126*32.2



High transmittance Matte Cover

The light transmission rate of Matte Cover is 95% of that of ordinary glass, providing soft light without any loss in brightness.



Adjustable infrared sensor


Adjustable sensitivity and response time, and the option to freely switch between day/night operation modes.

Product application diagram






Apple 1 Flood Light



Watt.	Color Temp.	Lm	Driver	Unit Size(mm)
10W	2800K/4000K/6500K	1100	Linear	104.5*84.5*28.3
20W	2800K/4000K/6500K	2200	Linear	118*93*28.3
30W	2800K/4000K/6500K	3300	Linear	160*120*28.5
50W	2800K/4000K/6500K	5500	Linear	203.8*145*29.5
70W	2800K/4000K/6500K	7700	Linear	236.5*177*29.5
100W	2800K/4000K/6500K	11000	Linear	269*209*29.65
150W	2800K/4000K/6500K	16500	Linear	334*228.5*30.65
200W	2800K/4000K/6500K	22000	Linear	377.5*277*31.3



Highlighting LED Chips with textured glass


The light transmittance is over 92%, ensuring the optimal performance of the LED Chips.



Optional sensor installation

Adjustable sensitivity and response time, and the option to freely switch between day/night operation modes.

Product application diagram

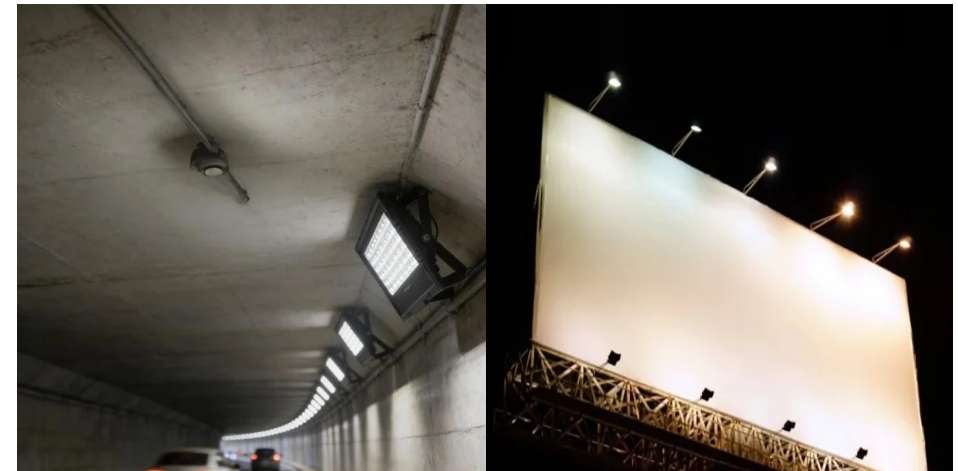



Apple 2 Flood Light



RA>80

PF>0.9


Warranty: 2Years

Beam Angle: 120°

Material: ALU+Glass

IP65

Watt.	Color Temp.	Lm	Driver	Unit Size(mm)
10W	2800K/4000H/6500K	1100	Linear	104.5*84.5*28.3
20W	2800K/4000H/6500K	2200	Linear	118*93*28.3
30W	2800K/4000H/6500K	3300	Linear	160*120*28.5
50W	2800K/4000H/6500K	5500	Linear	203.8*145*29.5
70W	2800K/4000H/6500K	7700	Linear	236.5*177*29.5
100W	2800K/4000H/6500K	11000	Linear	269*209*29.65
150W	2800K/4000H/6500K	16500	Linear	334*228.5*30.65
200W	2800K/4000H/6500K	22000	Linear	377.5*277*31.3



Highlighting LED Chips with textured glass

The light transmittance is over 92%, ensuring the optimal performance of the LED Chips.



Optional sensor installation

Adjustable sensitivity and response time, and the option to freely switch between day/night operation modes.

Product application diagram





Apple 3 Toggle Switch Flood Light
(Detachable Sensor)



RA>80

PF>0.9

Warranty:
2Years


Bean Angle:
120°

Material:
ALU+Glass

3CCT
Change

IP65

Watt.	Color Temp.	Lm	Driver	Unit Size(mm)
10W	3CCT	1000	Linear	92*70*31
20W	3CCT	2000	Linear	120*95*31
30W	3CCT	3000	Linear	153*125*31
50W	3CCT	5000	Linear	188*146*31
70W	3CCT	7000	Linear	228*185*32
100W	3CCT	10000	Linear	272*217*32
150W	3CCT	15000	Linear	327*263*32
200W	3CCT	20000	Linear	378*298*34
300W	3CCT	30000	Linear	378*298*34

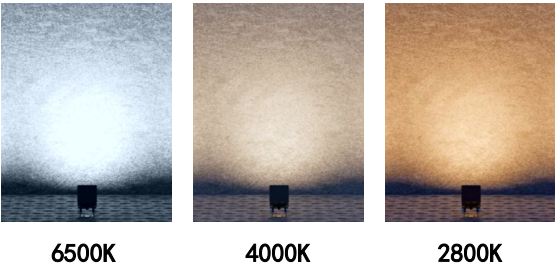

Turn the switch to adjust the color temperature
By turn the switch at the bottom of the lamp body, you can easily adjust the color temperature of the product (6500K/4000K/2800K).

Product application diagram





Zoom 1 Flood Light



Integrated transparent PS panel + lens

Ensure that the light emission angle is maintained while not sacrificing brightness.



High-intensity waterproof plug

Integrated plastic + metal plug with dual waterproofing capabilities

RA>80	PF>0.9	Warranty: 2Years	Beam Angle: 90°	Material: ALU+Glass	IP65
-------	--------	---------------------	--------------------	------------------------	------


Watt.	Color Temp.	Lm	Unit Size(mm)
10W	6000-6500K	1000	130*112*24
20W	6000-6500K	2000	143*132*24
30W	6000-6500K	3000	164*158*24
50W	6000-6500K	5000	200*170*24
100W	6000-6500K	10000	260*217*24
150W	6000-6500K	15000	325*260*25
200W	6000-6500K	20000	375*287*25
300W	6000-6500K	30000	415*317*25
400W	6000-6500K	40000	455*347*25

Product application diagram





Zoom 2 Flood Light

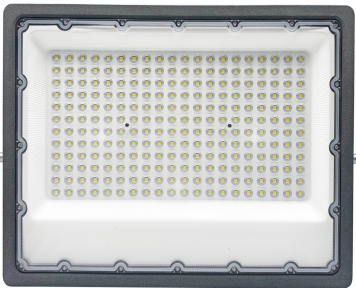

RA>80

PF>0.9

Warranty: 2Years

Beam Angle: 120°

Material: ALU+ABS


Color:

IP65

Watt.	Color Temp.	Lm	Unit Siz(m)e
10W	6000-6500K	810	137*36*110
20W	6000-6500K	1620	137*36*110
30W	6000-6500K	2430	180*36*130
50W	6000-6500K	4050	200*36*155
100W	6000-6500K	8100	260*38*190
150W	6000-6500K	16200	370*38*270
200W	6000-6500K	24300	420*38*310



Completely sealed rubber strip
The connection points of the panel are sealed with a full-angle sealing rubber strip to ensure a watertight effect.



Backwave heat dissipation design
Employing wave-shaped heat dissipation fins to increase air flow velocity and contact area.

Product application diagram





Zoom 3 Flood Light



RA>80

PF>0.9


Warranty:
2Years

Beam Angle:
120°

Material:
ALU+Glass



Watt.	Color Temp.	Lm	Unit Size(mm)
10W	6000-6500K	1000	90*58*28
20W	6000-6500K	2000	110*80*28
30W	6000-6500K	3000	140*110*30
50W	6000-6500K	5000	180*125*30
70W	6000-6500K	7000	220*172*30
100W	6000-6500K	10000	260*190*30
150W	6000-6500K	15000	325*227*30
200W	6000-6500K	20000	385*263*31
300W	6000-6500K	30000	440*300*34



Highlighting LED Chips with textured glass

The light transmittance is over 92%, ensuring the optimal performance of the LED Chips.



High-strength aluminum material

Using high-strength aluminum materials and die-casting technology to enhance the product's strength.

Product application diagram





Dash 1 Solar Flood Light




Charging time:
5-6Hours



Full-charge operating time
10-12Hours



Warranty:
2Years

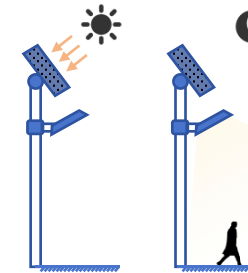

Using remote control to operate the product

It can switch between multiple modes: automatic lighting at a set time, solar light sensing, or manual switch.

Monocrystalline silicon solar panel

No need for an electrical connection. With sufficient sunlight, it can illuminate for 10-12 hours even when exposed to sunlight for 5 hours.


Product application diagram



Watt.	Battery capacity	Lm	Photovoltaic Panel Power	Photovoltaic Panel Size(mm)	Unit Size(mm)
100W	6000mAh	700	8W DC5V	205*300*16	234*72*196
200W	10000mAh	1200	12W DC5V	235*350*16	260*80*218
300W	15000mAh	1900	18W DC5V	280*390*16	308*95*265
400W	20000mAh	2400	22W DC5V	360*390*16	356*100*285



Dash 2 Solar Flood Light




Using remote control to operate the product

It can switch between multiple modes: automatic lighting at a set time, solar light sensing, or manual switch.

Monocrystalline silicon solar panel

No need for an electrical connection. With sufficient sunlight, it can illuminate for 10-12 hours even when exposed to sunlight for 5 hours.




Watt.	Battery capacity	Lm	Photovoltaic Panel Power	Photovoltaic Panel Size(mm)	Unit Size(mm)
100W	5400mAh	600	8W DC5V	205*300*16	234*72*196
200W	9000mAh	900	12W DC5V	235*350*16	260*80*218
300W	14000mAh	1450	18W DC5V	280*390*16	308*95*265
400W	18000mAh	2000	22W DC5V	360*390*16	356*100*285

Product application diagram





Zoom 2 Solar Flood Light



Using remote control to operate the product

It can switch between multiple modes: automatic lighting at a set time, solar light sensing, or manual switch.

Monocrystalline silicon solar panel

No need for an electrical connection. With sufficient sunlight, it can illuminate for 10-12 hours even when exposed to sunlight for 5 hours.



Charging time:
5-6Hours

Full-charge operating time:
10-12Hours

Warranty:
2Years

Watt.	Battery capacity	Lm	Photovoltaic Panel Power	Photovoltaic Panel Size(mm)	Unit Size(mm)
100W	6000mAh	650	8W DC6V	350*235*16	217*180*42
200W	9000mAh	1100	12W DC6V	350*290*16	245*204*42
300W	15000mAh	1650	18W DC6V	400*350*16	270*220*42
400W	21000mAh	2400	22W DC6V	450*350*16	306*260*42
500W	27000mAh	3200	30W DC6V	600*350*17	300*45*348

Product application diagram





LED SMART LIGHT

Smart lights offer convenient features such as remote control, voice activation, adjustable brightness and color temperature, scheduling, and scene automation. Energy-efficient and easy to use, they are ideal for homes (e.g., living rooms, bedrooms, kitchens), offices, hotels, and commercial spaces—enhancing both lighting experience and smart living.



SP-SMART-AB-9W/12W



Optional Voltage:
-110-130V
-220-240V
-100-265V
Power: 9W/12W
Product Parameter:
-PF>0.5
-CRI: 80




RGB:
Red/Yellow/Blue/Green/Purple



Color Temperature
2700-6500K



SP-SMART-GU10-5W



Optional Voltage:
-110-130V
-220-240V
-100-265V
Power: 5W
Product Parameter:
-PF>0.5
-CRI: 80



RGB:
Red/Yellow/Blue/Green/Purple



Color Temperature
2700-6500K



SP-SMART-LZ-5W



Optional Voltage:
-110-130V
-220-240V
Product Parameter:
-Power: 5W
-PF>0.5
-CRI: 80



RGB:
Red/Yellow/Blue/Green/Purple




Color Temperature
2700-6500K



SP-SMART-XDD-B



Optional Voltage:
-100-265V
Product Parameter:
-Power: 20W
-PF>0.5
-CRI: 80
-Material: PP



RGB:
Red/Yellow/Blue/Green/Purple



Color Temperature
2700-6500K



SP-SMART-ZFW



Product Parameter:

- Power: 24W
- PF>0.5
- CRI: 80
- Material: ABS




RGB:
Red/Yellow/Blue/Green/Purple



Color Temperature
2700-6500K



SP-SMART-CFW-CCT+RGB



Product Parameter:

- Power: 24W
- PF>0.5
- CRI: 80
- Material: ABS



RGB:
Red/Yellow/Blue/Green/Purple



Color Temperature
2700-6500K



SP-SMART-CFW



Product Parameter:

- Power: 24W
- PF>0.5
- CRI: 80
- Material: ABS





RGB:
Red/Yellow/Blue/Green/Purple



Color Temperature
2700-6500K

SP-SMART-LDS-RD

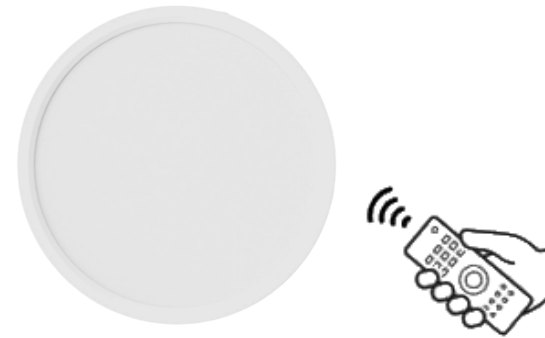

RGB:
Red/Yellow/Blue/Green/Purple



Color Temperature
2700-6500K





SP-SMART-LDS-RD



Product Parameter:

- Power: 30W
- PF>0.5
- CRI: 80
- Material: PC



RGB:

Red/Yellow/Blue/Green/Purple



Color Temperature

2700-6500K

SP-SMART-SFX-RGBCCT



Product Parameter:

- Material: PC
- IP44



Power	Diameter (mm)	Cut-out (mm)	Height (mm)
3W	90mm	70-75	50
6W	115mm	90-102	50
9W	130mm	105-115	50
12W	145mm	120-130	50
18W	175mm	145-155	50
24W	225mm	195-210	50



RGB:

Red/Yellow/Blue/Green/Purple



Color Temperature

2700-6500K





SP-SMART-FGD-CCT



Product Parameter:

- Voltage: 48V
- CRI: 80



Power	Model	Size(mm)
10W	XJ-FGD-300mm	L301*W22*H45
20W	XJ-FGD-600mm	L601*W22*H45
30W	XJ-FGD-900mm	L901*W22*H45



Color Temperature
2700-6500K



SP-SMART-GSD-CCT



Product Parameter:

- Voltage: 48V
- CRI: 80



Power	Model	Size(mm)
6W	XJ-GSD-6D	L114*W22*H45
12W	XJ-GSD-12D	L222*W22*H45
18W	XJ-GSD-18D	L330*W22*H45



Color Temperature
2700-6500K



SP-SMART-ZDGSD-CCT



Product Parameter:

-Voltage: 48V
-CRI: 80



Power	Model	Size(mm)
6W	XJ-ZDGSD-6D	L116*W22*H96
12W	XJ-ZDGSD-12D	L223*W22*H96
18W	XJ-ZDGSD-18D	L331*W22*H96




Color Temperature
2700-6500K

SP-SMART-GD-CCT



Product Parameter:

-Power: 12W
-Lamp body size: Ø 42*H100mm
-Voltage: 48V
-CRI: 90



Color Temperature
2700-6500K





SP-SMART-GDZD-CCT



Product Parameter:

- Power: 12W
- Lamp body size: $\varnothing$ 40*H300mm
- Voltage: 48V
- CRI: 90



Color Temperature
2700-6500K




SP-SMART-GDYD-CCT



Product Parameter:

- Power: 15W
- Lamp body size: $\varnothing$ 90*H70mm
- Voltage: 48V
- CRI: 90



Color Temperature
2700-6500K